


DIN ISO 6751 (DIN 1530, TYP A, oxid & nitrid)

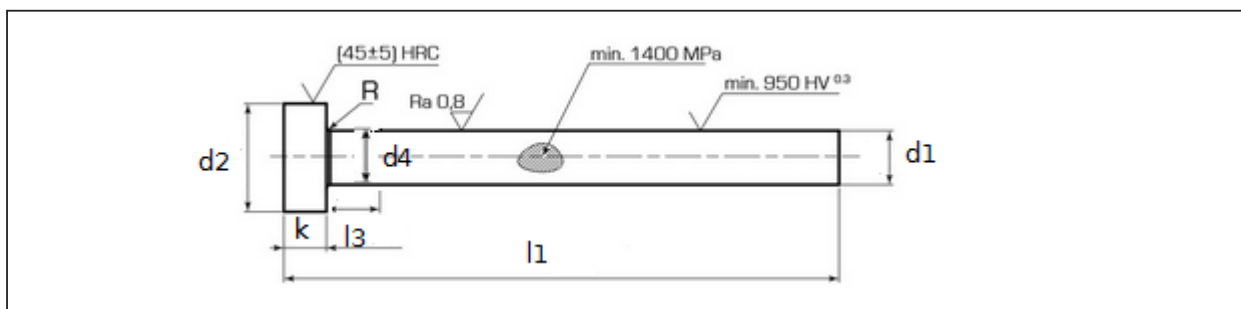

Objednávacie číslo: **COM – 6115**

Materiál:
1.2343 – nástrojová oceľ

Max. pracovná teplota 500/550°C
Vhodné najmä pre tlakové odlievanie

Príklad objednania : COM-6115 - d1x11

d ₁	d ₂	d ₄	k	r	l ₁ + 2 0										l ₃								
					100	125	160	200	250	315	400	500	630	800		1000							
g 6	0 -0,2		0 -0,05	+ 0,2 0																			
1,0	2,5	d ₁ + 0,03	1,2	0,2	●	●	●	●															
1,1					●	●	●	●															
1,2					●	●	●	●															
1,3					●	●	●	●															
1,4	3		1,5		●	●	●	●	●														
1,5					●	●	●	●	●	●													
1,6					●	●	●	●	●	●	●												
1,7					●	●	●	●	●	●	●	●											
1,8	4	2	0,2	●	●	●	●	●	●	●	●												
1,9				●	●	●	●	●	●	●	●	●	●										
2,0				●	●	●	●	●	●	●	●	●	●	●									
2,1				●	●	●	●	●	●	●	●	●	●	●									
2,2	5		0,3	●	●	●	●	●	●	●	●	●											
2,5				●	●	●	●	●	●	●	●	●	●										
2,6				●	●	●	●	●	●	●	●	●	●	●									
2,7				●	●	●	●	●	●	●	●	●	●	●									
2,8					●	●	●	●															

● = Dostupné veľkosti

☺ Špeciálna výroba na dopyt

Vyhadzovač valcový oxid & nitrid TYP A COM-6115

DIN ISO 6751 (DIN 1530, TYP A, oxid & nitrid)

d ₁	d ₂	d ₄	k	r	l ₁											l ₃					
					+ 2 0																
g 6	0 -0,2		0 -0,05	+0,2 0	100	125	160	200	250	315	400	500	630	800	1000	1250					
8,7	14	d ₁ +0,03	5	0,5	•	•	•	•									8				
9,0					•	•	•	•	•	•	•	•	•	•	•	•		•			
9,5					•	•	•	•	•	•	•	•	•	•	•	•		•	•		
10,0	16	d ₁ +0,04			7	0,8	•	•	•	•	•	•	•	•	•	•	•	•	10		
10,2							•	•	•	•	•	•	•	•	•	•	•	•		•	•
10,5							•	•	•	•	•	•	•	•	•	•	•	•		•	•
11,0			•	•			•	•	•	•	•	•	•	•	•	•	•	•		•	
11,5			•	•			•	•					•			•					
12,0	18	d ₁ +0,04	7	0,8			•	•	•	•	•	•	•	•	•	•	•	•	12		
12,2					•	•	•	•	•	•	•	•	•	•	•	•	•	•			
12,5					•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	
13,0					•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	
13,5													•								
14,0	22	d ₁ +0,07			8	1,1	•	•	•	•	•	•	•	•	•	•	•	•	14		
14,5												•									
15,0			•	•			•	•	•	•	•	•	•	•	•	•	•	•		•	
16,0			•	•			•	•	•	•	•	•	•	•	•	•	•	•		•	
16,5													•								
18,0	24	d ₁ +0,07	10	1,1			•	•	•	•	•	•	•	•	•	•	•	•	16		
18,5												•									
19,0								•													
19,5													•								
20,0					•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	
20,2	26	d ₁ +0,1			10	1,1		•	•	•	•	•	•	•	•	•	•	18			
20,5													•								
25,0			•	•			•	•	•	•	•	•	•	•	•	•	•		•		
32,0	40	d ₁ +0,1						•	•	•	•	•	•	•	•	•	•	•	20		
																			25		
																			32		

• = Dostupné veľkosti

☎ Špeciálna výroba na dopyt